


# EXTRA BART DX OUTPUT TO DX INPUT

BART DX 1-4 DB9M TO TC-316, TC3161, TC-631, TC-124 DX INPUT

(REQUIRES A DB9F TO 6 PIN MOLEX SHELL ON CABLE)

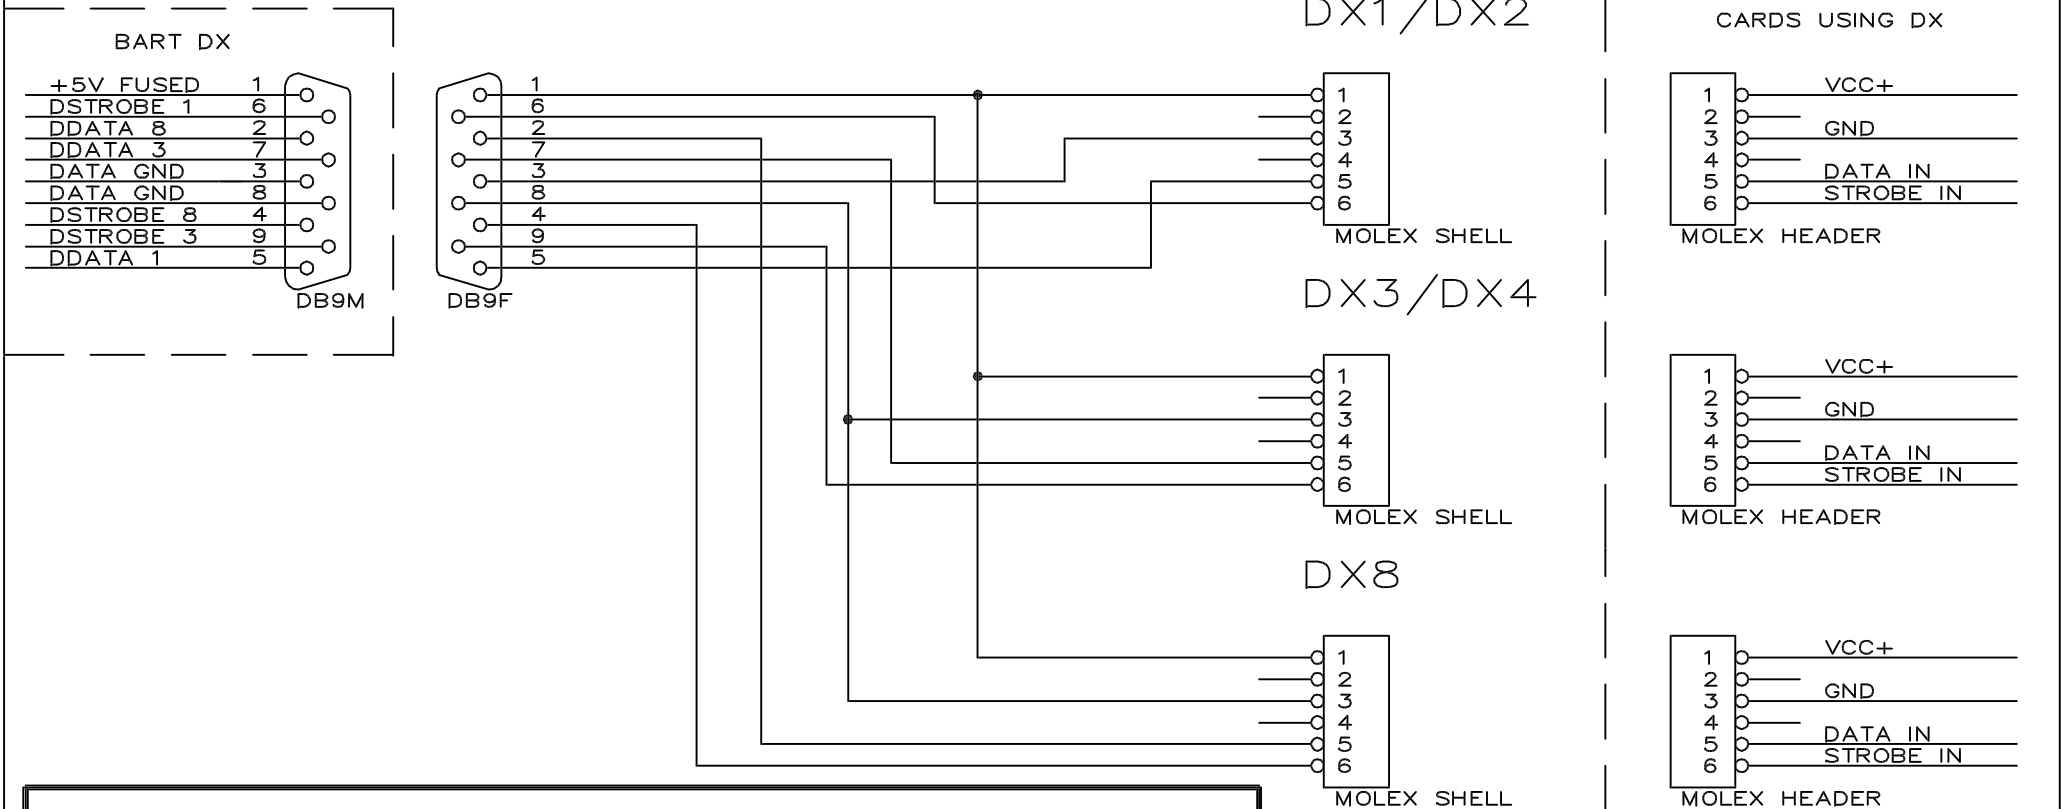

BART DB9M		LOGICAL OUTPUT			CABLE WIRE	CARDS USING DX 6 PIN MOLEX HEADER	
PIN	SIGNAL	DX1/3	DX2/4	DX8	COLOR	PIN	SIGNAL
1.	FUSED +5VDC				WHITE	1.	+VCC IN
2.	DIGITAL DATA			DX8	GREEN	5.	DATA IN
3.	DATA GND				BLACK	3.	GND
4.	STROBE FOR DATA			DX8	RED	6.	STROBE IN
5.	DIGITAL DATA	DX1	DX2		GREEN	5.	DATA IN
6.	STROBE FOR DATA	DX1	DX2		RED	6.	STROBE IN
7.	DIGITAL DATA	DX3	DX4		GREEN	5.	DATA IN
8.	DATA GND				BLACK	3.	GND
9.	STROBE FOR DATA	DX3	DX4		RED	6.	STROBE IN

PLACE SHIELD ON BART DX OUT GND (BELDEN 8723 COLOR CODE USED)

TRIAD PRODUCTIONS INC.		
Title		
BART EXTRA DX OUTPUT CABLE		
Size	Document Number	REV
A	BARTCLUG.OCD	A
Date:	July 10, 1995	Sheet 1 of 1