
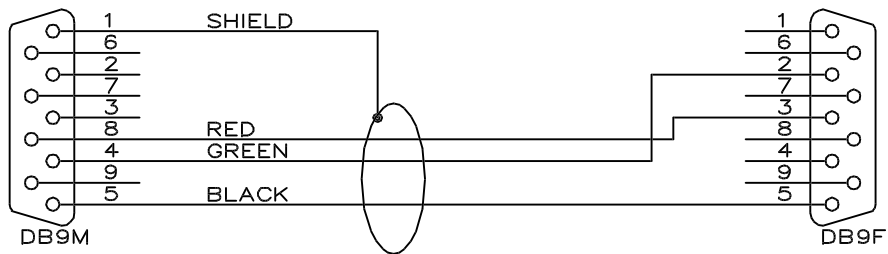


BART C AND D "SER" PORT TO "IBM" STANDARD DB9M SERIAL PORT


BART RS-232 SERIALS C AND D DB9F TO "IBM" STANDARD DB9M SERIAL PORT

(REQUIRES A DB9M TO DB9F ON THE CABLE)


BART SERIAL C

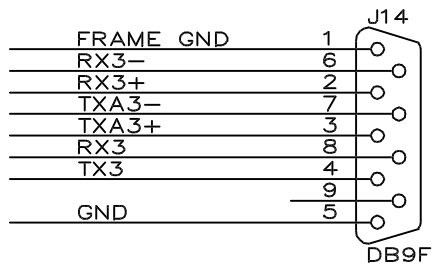

DB9 SERIAL PORT

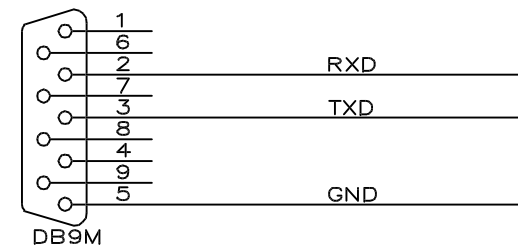

BART SERIAL D

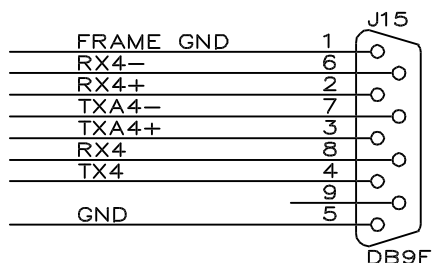

BART DB9F		CABLE WIRE	"IBM" STANDARD DB9M
SERIAL C	D		
PIN	SIGNAL	COLOR	PIN SIGNAL
1.	FR SH	SHIELD	
2.	RX3+		2. RXD
3.	TXA3+		5. GND
4.	TX3	GREEN	
5.	GND	BLACK	
6.	RX3-		
7.	TXA3-		
8.	RX3	RED	3. TXD
9.	NC		

(BELDEN 8723 COLOR CODE USED)

CABLE APPLICATION:
THIS CABLE IS USED TO INTERFACE BETWEEN
A BART "SER" RS-232 DB9F TO ANY "IBM" STANDARD
DB9M SERIAL COMMUNICATION PORT.

TRIAD PRODUCTIONS, INC.		
Title BART SERIAL C AND D TO "IBM" SERIAL DB9		
Size A	Document Number BARTCCOM.OCD	REV A
Date:	September 21, 1995	Sheet 1 of 1