
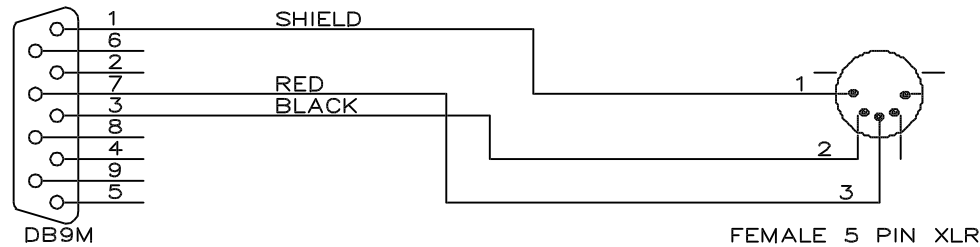



BART "SER" C PORT TO DMX STANDARD CONTROL DEVICE

BART RS-485 SERIAL C DB9F TO 5 PIN XLRM DMX DEVICE
(REQUIRES A DB9M TO XLRM ON THE CABLE)

BART SERIAL C

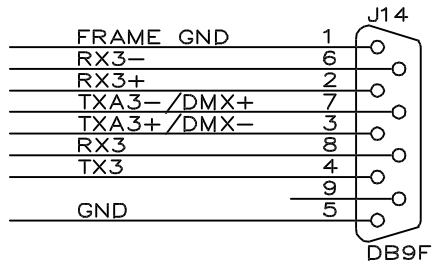

DMX DEVICE

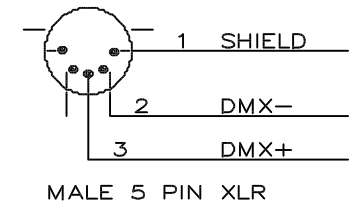

BART SERIAL C DB9F		CABLE WIRE	"IBM" STANDARD DB9M	
PIN	SIGNAL	COLOR	PIN	SIGNAL
1.	FR SH		1.	SHIELD
2.	RX3+		2.	DMX-
* 3.	TXA3+ / DMX-	BLACK	3.	DMX+
4.	TX3			
5.	GND			
6.	RX3-			
* 7.	TXA3- / DMX+	RED		
8.	RX3			
9.	NC			

(BELDEN 8723 COLOR CODE USED)

CABLE APPLICATION:
THIS CABLE IS USED TO INTERFACE BETWEEN
A BART "SER" RS-485 DB9F TO A STANDARD
5 PIN XLR DMX SERIAL DEVICE.

TRIAD PRODUCTIONS, INC.

Title		
BART SERIAL C RS-485 TO XLR DMX DEVICE		
Size	Document Number	REV
A	BARTDMX.OCD	A
Date:	December 18, 1997	Sheet 1 of 1