


COMPUTER COM TO COMPUTER COM


(REQUIRES A DB9F TO TELCO RECEPTACLE ON THE ADAPTERS)
 (REQUIRES A TELCO PLUG TO TELCO PLUG ON THE CABLE)
 ADAPTERS SHOULD BE USED WITH A REVERSE (FLIPPED) TELCO TO TELCO CABLE

TRIAD TELCO
 REVERSE TELCO


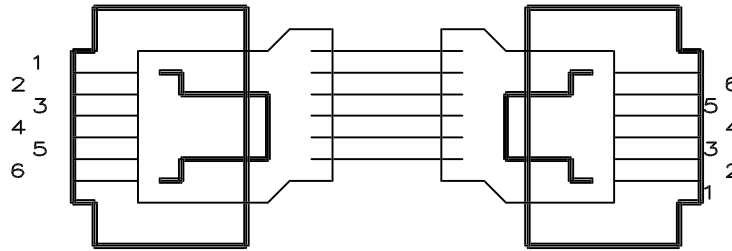


VIEW:

OUTSIDE BACK OF ADAPTER

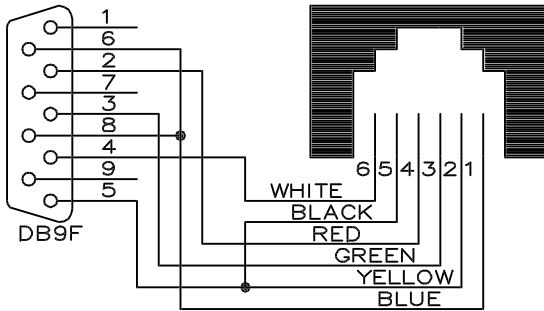


TELCO CABLE		TELCO CABLE	
PIN	COLOR	PIN	COLOR
1.	BLUE	1.	WHITE
2.	YELLOW	2.	BLACK
3.	RED	3.	GREEN
4.	GREEN	4.	RED
5.	BLACK	5.	YELLOW
6.	WHITE	6.	BLUE

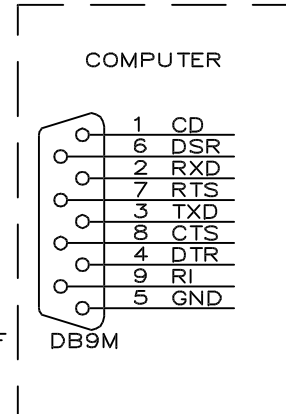

COMPUTER DB9M		ADAPTER		ADAPTER TELCO RECEPTACLE	
PIN	SIGNAL	COLOR	PIN	SIGNAL	
6./8.	DSR/CTS	BLUE	1.	NC	
5.	GND	YELLOW	2.	GND	
3.	TXD	GREEN	3.	RXD	
2.	RXD	RED	4.	TXD	
5.	GND	BLACK	5.	GND	
4.	DTR	WHITE	6.	+5VDC	

DOUBLE CRIMP YELLOW AND BLACK LOOP WHITE AT DB9



CABLE APPLICATION:
 THIS CABLE CAN BE USED TO
 CONNECT TWO COMPUTERS TOGETHER
 FOR SERIAL DATA COMMUNICATIONS.

NOTE: WIRING COLORS MAY NOT BE STANDARD
 ON ALL ADAPTERS.
 USE PIN PLACEMENT FOR PROPER SIGNALS

TRIAD PRODUCTIONS, INC.		
Title COMPUTER SERIAL TO COMPUTER SERIAL CABLE		
Size A	Document Number NULMODEM.OCD	REV A
Date: November 3, 1995	Sheet 1 of	1