



# COMPUTER DB9 COM PORT TO ELCO PLUG ELCO RECEPTACLE TO DB25 PIC INTERFACE

STANDARD COMPUTER RS-232 DB9M COM PORT TO 56 PIN ELCO PLUG  
(REQUIRES A DB9F TO 56 PIN ELCO PLUG ON CABLE)

ELCO RECEPTACLE TO RS-232 DB25F PIC INTERFACE  
(REQUIRES A 56 PIN ELCO RECEPTACLE TO DB25M ON CABLE)

(NOTE: ONLY PORTIONS OF THE ELCO CONNECTORS ARE SHOWN)

## COMPUTER COM PORT

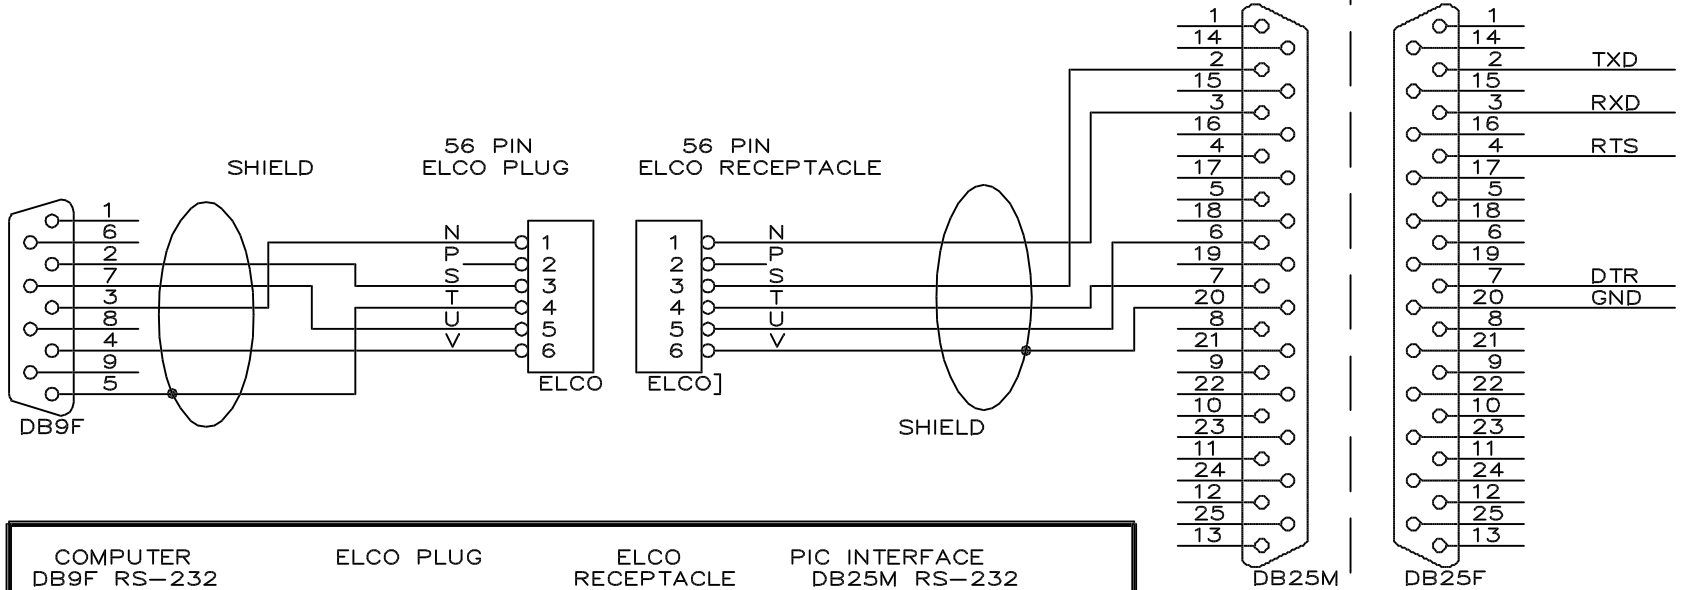

COMPUTER DB9F RS-232	ELCO PLUG 56 PIN	ELCO RECEPTACLE 56 PIN	PIC INTERFACE DB25M RS-232
PIN	SIGNAL		PIN
2.	RXD	S	2.
3.	TXD	N	3.
4.	DTR	V	20.
5.	GND & SHIELD	T	7.
7.	RTS	U	6.

CABLE APPLICATION:  
THIS CABLE IS USED AS AN INTERFACE  
BETWEEN AN "IBM" DB9M RS-232 SERIAL  
PORT TO A PLC PIC INTERFACE.

TRIAD PRODUCTIONS, INC.		
Title		
IBM DB9 SERIAL PORT TO PIC INTERFACE		
Size	Document Number	REV
A	PICINTER.OCD	A
Date:	November 20, 1995	Sheet 1 of 1