


# COMPUTER COM TO TRIAD SERIAL STANDARD TELCO

THE TRIAD TELCO CONNECTOR IS STANDARD ON THE TC-3550, TC-560, AND BART  
 COMPUTER DB9M COM TO TRIAD STANDARD RS-232 SERIAL TELCO RECEPTACLE

(REQUIRES A DB9F TO TELCO RECEPTACLE ON THE ADAPTER)  
 (REQUIRES A TELCO PLUG TO TELCO PLUG ON THE CABLE)

ADAPTER SHOULD BE USED WITH A STRAIGHT TELCO TO TELCO CABLE

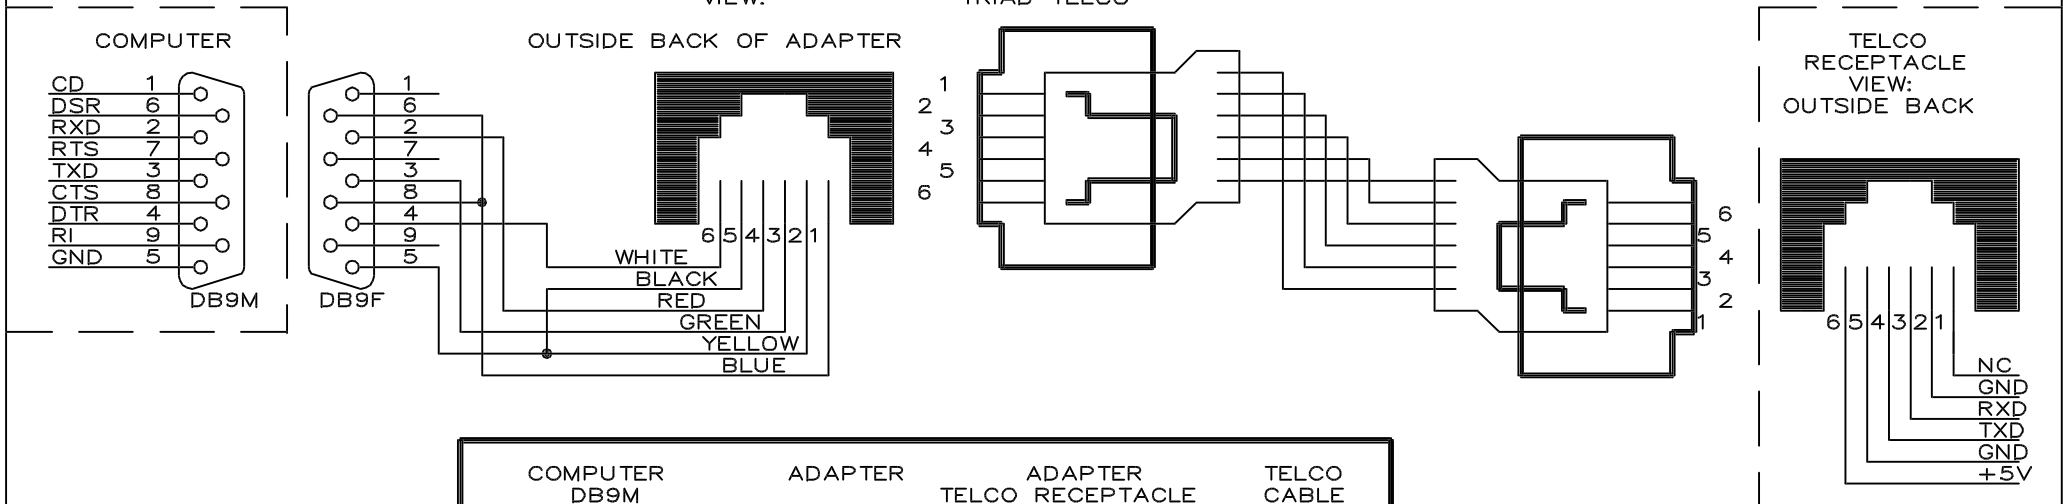

COMPUTER DB9M	ADAPTER	ADAPTER TELCO RECEPTACLE	TELCO CABLE	
PIN	SIGNAL	COLOR	PIN SIGNAL COLOR	
6./8.	DSR/CTS	BLUE	1. NC	BLUE
5.	GND	YELLOW	2. GND	YELLOW
3.	TXD	GREEN	3. RXD	GREEN
2.	RXD	RED	4. TXD	RED
5.	GND	BLACK	5. GND	BLACK
4.	DTR	WHITE	6. +5VDC	WHITE

DOUBLE CRIMP YELLOW AND BLACK LOOP WHITE AT DB9

CABLE APPLICATION:  
 THIS CABLE CAN BE USED WITH ANY TRIAD STANDARD TELCO PORT TO COMMUNICATE WITH A COMPUTER PORT. IT IS SENT WITH ALL BARTS.

NOTE: WIRING COLORS MAY NOT BE STANDARD ON ALL ADAPTERS. USE PIN PLACEMENT FOR PROPER SIGNALS

TRIAD PRODUCTIONS, INC.		
Title TRIAD TELCO TO COMPUTER SERIAL CABLE		
Size A	Document Number TELCOMAD.OCD	REV A
Date:	November 3, 1995	Sheet 1 of 1