TRIAD SERIAL STANDARD TELCO TO TC-642

THE TRIAD TELCO CONNECTOR IS STANDARD ON THE TC-3550, TC-560, AND BART

TRIAD STANDARD RS-232 SERIAL TELCO RECEPTACLE TO TC-642 DB9F

(REQUIRES A TELCO PLUG TO TELCO PLUG ON THE CABLE)
(REQUIRES A TELCO RECEPTACLE TO DB9M ON THE ADAPTER)

ADAPTER SHOULD BE USED WITH A STRAIGHT TELCO TO TELCO CABLE

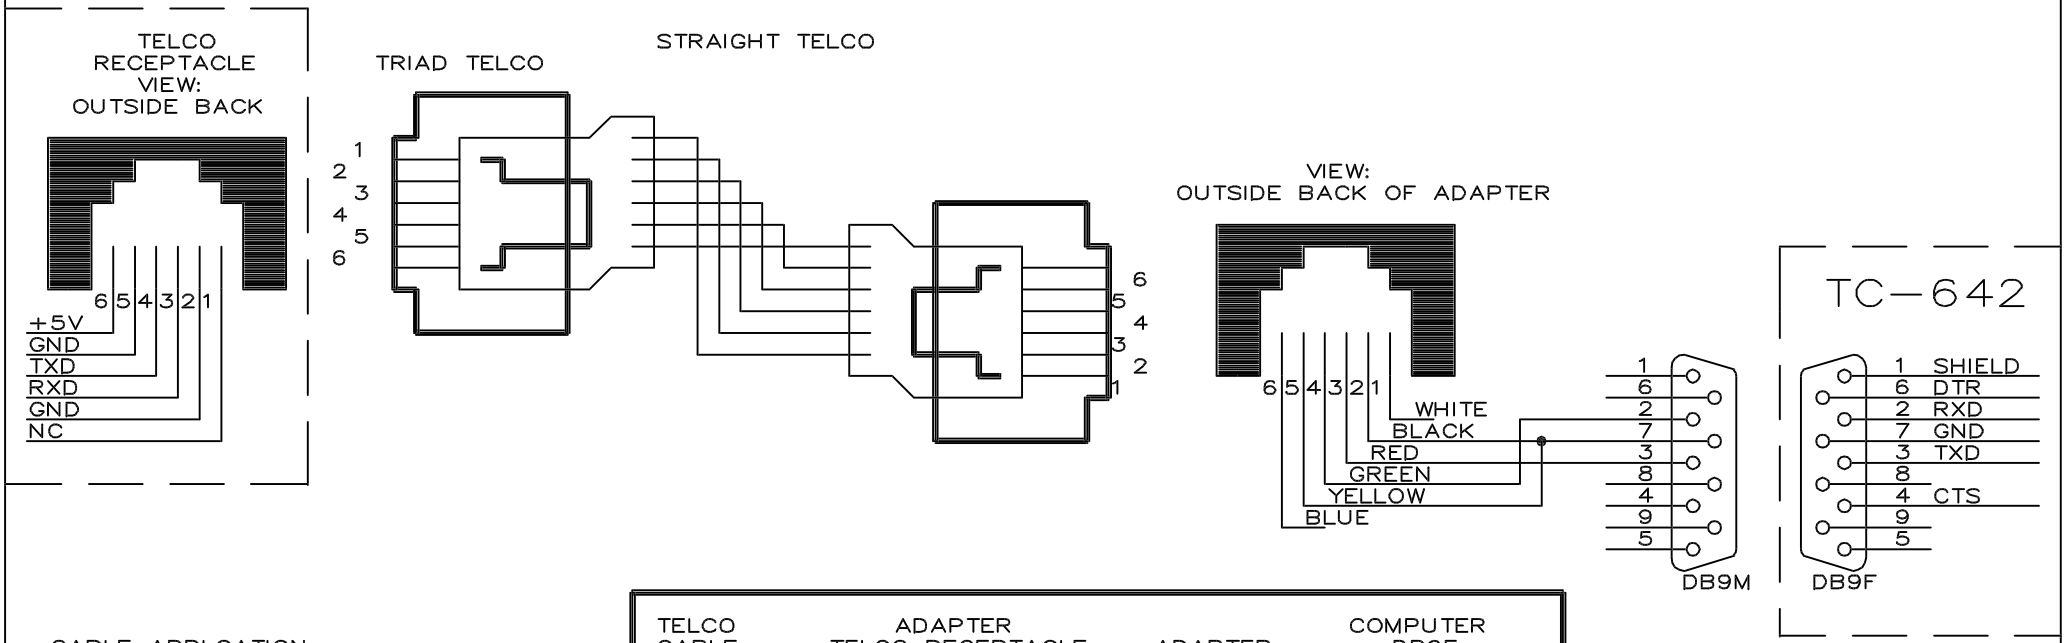

CABLE APPLCATION:
THIS CABLE IS USED TO CONNECT ANY TRIAD STANDARD TELCO PORT TO A TC-642 DB9F SERIAL PORT.

TELCO CABLE	ADAPTER TELCO RECEPTACLE		ADAPTER	COMPUTER DB9F	
COLOR	PIN	SIGNAL	COLOR	PIN	SIGNAL
BLUE	1.	NC	WHITE	NC	
YELLOW	2.	GND	BLACK	5.	GND
GREEN	3.	RXD	RED	3.	TXD
RED	4.	TXD	GREEN	2.	RXD
BLACK	5.	GND	YELLOW	5.	GND
WHITE	6.	+5VDC	BLUE	NC	

DOUBLE CRIMP YELLOW AND BLACK

NOTE: WIRING COLORS MAY NOT BE STANDARD ON ALL ADAPTERS.
USE PIN PLACEMENT FOR PROPER SIGNALS

TRIAD PRODUCTIONS, INC.		
Title: TRIAD TELCO TO TC-642 ADAPTER		
Size: A	Document Number: TELTO642.OCD	REV: A
Date: May 15, 1995	Sheet 1 of 1	